

Indicator


Indicator for magnetically operated level gauges, with float defect control robust, for temperature medium from -65 to +450 °C for frequent and and fast changing level Resolution < 10 mm, close formation of indicating elements

Product group **710**

Type **AVG3**

Sheet: 1/1 Revision: 4

Date: 04/22

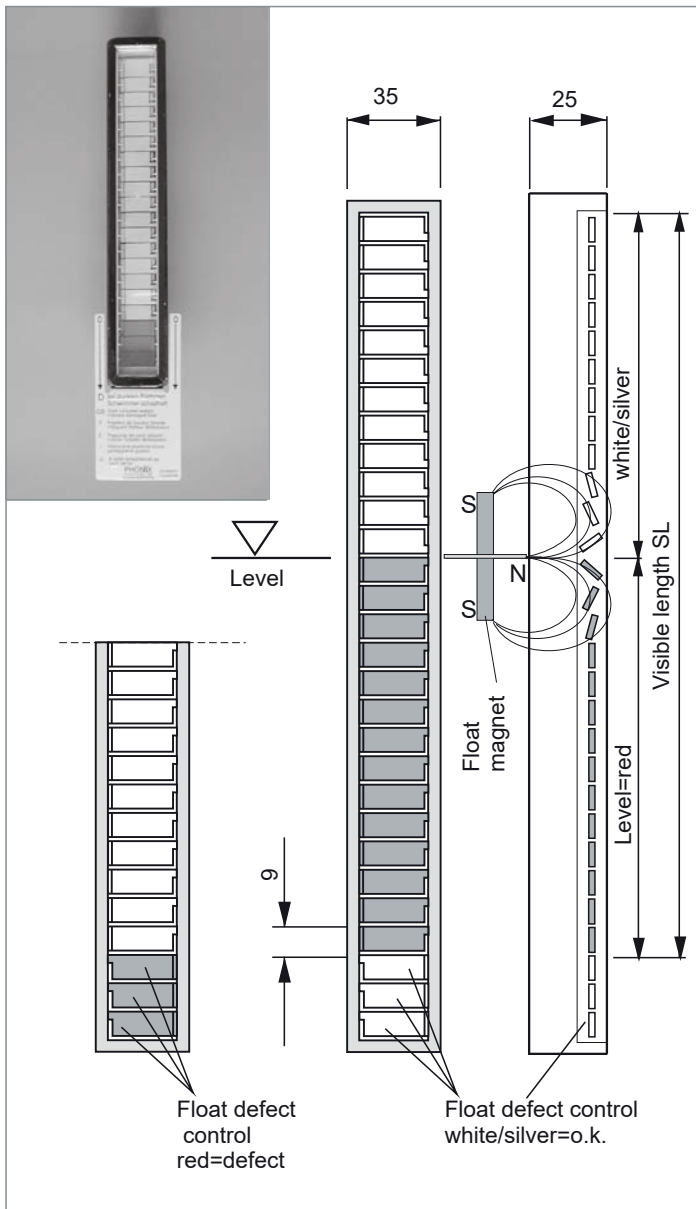

Field of Application

The indicator is for indirect reading liquid level in magnetically controlled level gauges.

General Data

Medium: separated from indicator
 Position: any around the pipe
 Sight angle: 150°
 Visible length: up to 6 m one piece, above splitted each 1,5 m to be fixed
 Float defect control: the 3 lowest elements are inverted
 Indicating element: permanent magnetized SS-plane laminars borne on SS-pins

Material

Display profile: AlMg
 Sight window: glass
 Laminars, pins: SS
 Plastic Protection: plastics

Design Data

Temperature ambient: -65 to +250 °C
 up to +250 °C, without protecting sheathing down to -65 °C, if no ripe appears caused by a too large temperature difference ambient - containment

Accessories

Protection profile: Alu
 Frost protection: PMM
 Straightening magnet: included

Special models

Other colors for the indicating elements, e. g. yellow-black, red-green, etc.

subject to alterations

Ordering no.

B G 1 0 A V G 3 X X X X

X	X	X		without float defect control
X	X	X	S	with float defect control
X	X	S	P	with float defect control and frost protection
X	X	X	G	indicating elements yellow - black, with float defect control

Phönix Control Kft.

Bolyki Tamás street 44.
 Ozd, 3600, Hungary
 Tel.: +36-48-572-310
 +36-48-572-567
 Fax.: +36-48-471-642
 E-mail: info@phoenix-brv.hu
 web: www.phoenixcontrol.hu